LONCOIN I

LONSEAL

The Loncoin series boasts a coin surface embossing that delivers a striking directional design — a decorative touch that provides style and enhanced traction. LONCOIN I is distinguished by a light texture around the coin shapes. It has been demonstrating its resilience in high-traffic interiors for decades.


STANDARD SIZES (nominal)

Overall thickness: 0.100" (2.5 mm)
Wear layer thickness: 0.031" (0.80 mm)
Roll Size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 0.8 lbs./sq. ft., 280 lbs./roll

Colors: Three available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore[®] Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
- Adhesives and Sealants: LEED IEQ Credit 4.1
- Flooring Systems: LEED IEQ Credit 4.3

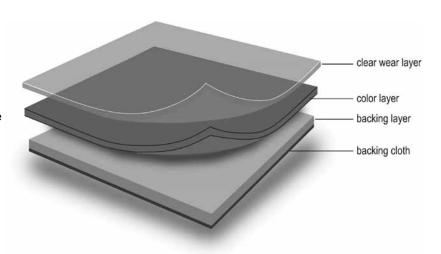

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

. = 0.1.1.1.0.7.1. 5.7.1.7.1	
Sheet Vinyl Floor Covering with Backing, ASTM F1303	.Type 1, Grade1, Class B
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	85
James Machine, SCOF, ASTM D2047	Neolite: 0.68; Neolite w/ Finish: 0.70
Abrasion Resistance, ASTM D3884	0.40%, 1,000 cycles
Static Load (max 0.005"), ASTM F970	850 psi
Short-term Indentation, ASTM F1914	0.009" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.0, Color: 4.0, Change: 4.2
Dimensional Stability, ASTM F2199	0.17% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925	

For detailed technical information, please refer to www.lonseal.com.







LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 04.14.14