


# Event High Gloss Specifications

# GREATMATS

Chic and sophisticated, Event High Gloss Vinyl Floor offers a dramatic option that makes a bold and dramatic statement. From entertainment venues to temporary floors and stages, Event High Gloss Vinyl Floor combines a great design with the ultimate fashion statement.

**STANDARD SIZES (nominal) Overall thickness:** 0.080" (2.0 mm) **Wear layer thickness:** 0.018" (0.45 mm) **Roll Size:** 6' (1.83 m) wide x 60' (18.3 m) **Weight:** 0.7 lb/sq. ft., 245 lbs/roll  
**Colors:** Four available

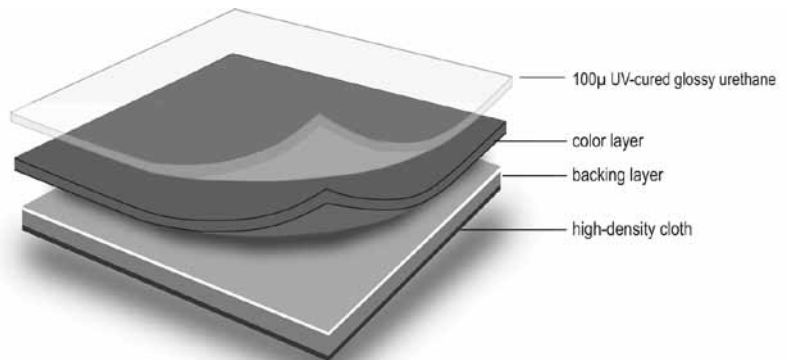

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOC's
- Over 35% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- Floorscore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
  - Low Emitting Materials
- Adhesives and Sealants: IEQ Credit 4.1
- Flooring Systems: IEQ Credit 4.3

## 10-YEAR WARRANTY

Manufacturer offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	95
James Machine, SCOF, ASTM D2047.....	Neolite: 0.64
Abrasion Resistance, ASTM D3884.....	0.54%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	750 PSI
Short-term Indentation, ASTM F1914.....	0.009" residual
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 5.0, Change: 5.0
Dimensional Stability, ASTM F2199.....	0.17%
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	Moderate Surface Attack: 5% Phenol Slight Color Change: 5% Pheonl

Greatmats.com

117 Industrial Avenue, Milltown, WI 54858

Toll Free: 877-822-6622 - Fax Toll Free: 866-895-5550

Direct Voice: 715-825-4926 - Direct Fax: 715-825-4928

info@greatmats.com

Revised 11-12-2013