

Wood Grain Natural with Topseal Vinyl Flooring Roll

Wood Grain Natural with Topseal pairs the timeless aesthetics of wood with the benefits of high-performance sheet vinyl in colors that range from earthy to quirky. Its soft grain patterning and smooth surface make Wood Grain Natural ideal for those who want the warmth of wood with easier maintenance. Ideal for corporate, healthcare, retail and hospitality applications, and coordinates beautifully with our LonCoin Flecks Commercial Vinyl Flooring.


Topseal is a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)
Wear layer thickness: 0.020" (0.5 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 0.6 lbs./sq. ft., 225 lbs./roll

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

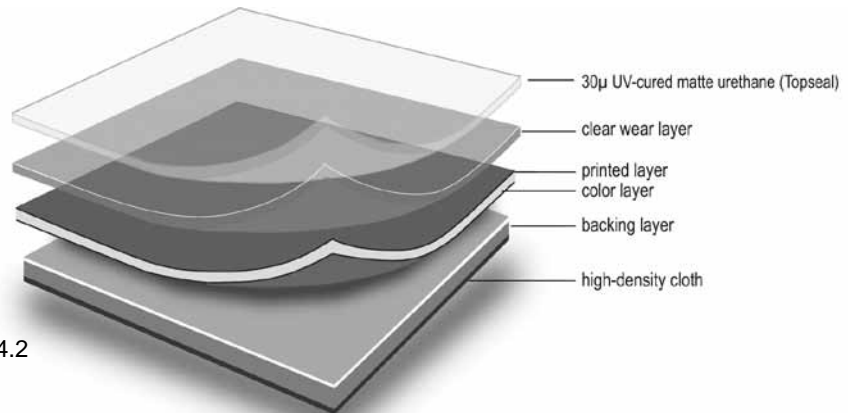

10-YEAR WARRANTY

The manufacturer offers a 10-year limited warranty.

Pattern Repeat: (nominal)
Machine direction: 37.4" (950 mm)
Cross direction: 24.4" (621 mm)

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	95
James Machine, SCOF, ASTM D2047.....	Neolite: 0.97
Abrasion Resistance, ASTM D3884.....	0.24%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	1,300 psi
Short-term Indentation, ASTM F1914.....	0.006" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.5, Color: 4.5, Index: 4.7
Dimensional Stability, ASTM F2199.....	0.67% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Moderate Surface Dulling: 5% Phenol

Greatmats.com
 117 Industrial Ave
 Milltown, WI 54858

Phone: 877-822-6622
 Fax: 715-825-4928
 info@greatmats.com
 12/2016

