

## Dance Cushion Elite 2 Part Subfloor System Installation

### Materials Needed:

Box cutter or utility knife, spare blades, lubricant for blades (WD-40) table saw or jig saw

### \*\*\* FOAM TILE INSTALLATION

\*Allow all flooring materials to acclimate to the room for 24-48 hours


Starting on the longest wall, leave a 1/4" to 1" gap from the wall. Begin interlocking the tiles together, working toward the opposite corner of the room.

Once all full tiles that do not require cutting have been installed, the perimeter mats or the mats next to the wall can be cut with a straight edge and utility knife. Keep the leftover cut pieces as these may be used again. Change blades as often as needed for cutting.

### \*\*\*CLICK TOP FLAT TOP TILE PAGE

Starting in the same corner as with the foam tiles, again leave a 1/4" to 1" gap from the wall.

**Step 1** The panels have 2 sides with female loops, and 2 sides with male pegs:

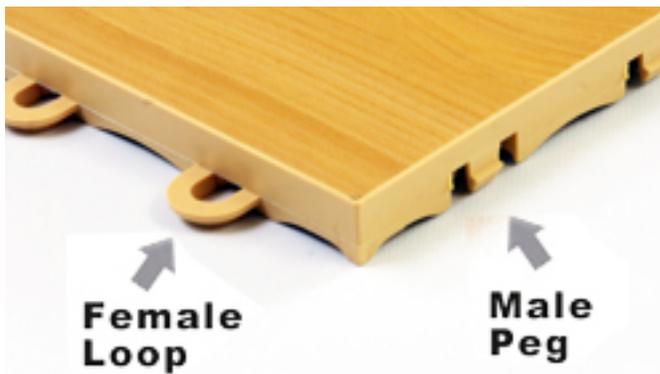

**Step 2** Start by laying your first panel in any corner (male edges required) or garage opening (female edges required) roughly 1/4 to 1" from the wall. The loops should be pointed in the direction you want to add panels:



## Dance Cushion Elite 2 Part Subfloor System Installation

**Step 3** Place the next panel so that the pegs line up over the loops:



**Step 4** Gently step on each panel. You will hear and feel it snap into place. Repeat these steps until your flooring is complete. That's all there is to it! All tiles on any given installation should ALWAYS HAVE THE FEMALE LOOPS GOING IN THE SAME DIRECTION. To cut the tiles, we recommend that you use a table saw. We also suggest that you keep a lubricating spray oil on hand to use on your blade. This will keep it from getting hot and melting the plastic tray of your tiles. You will want to be sure to spray directly on the blade and not on the tiles.

