

Smooth Commercial Vinyl Rolls Fleck

The granite character of the Smooth Commercial Vinyl Rolls sets a distinctive tone to any interior, and the wide-ranging colors available make it an exceptionally flexible option in commercial spaces including healthcare, offices, institutional, lobbies and showrooms.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)


Wear layer thickness: 0.031" (0.8 mm)

Roll size: 6' (1.8 m) wide x 60' (18.3 m)

Weight: 0.6 lbs./sq. ft., 220 lbs./roll

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

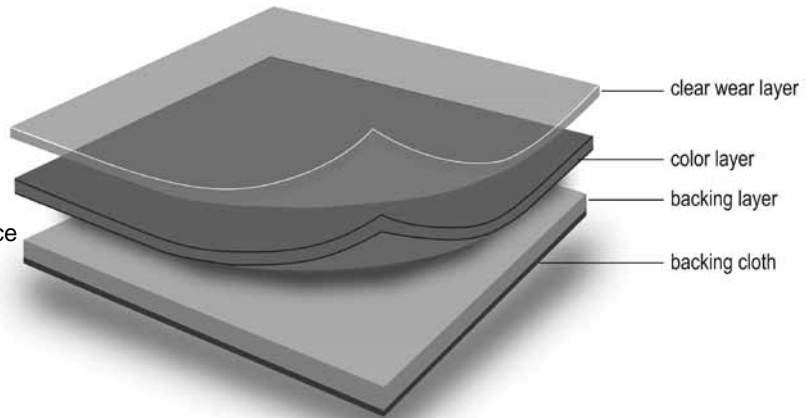

10-YEAR WARRANTY

The manufacturer offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.63; Neolite w/ Finish: 0.66
Abrasion Resistance, ASTM D3884.....	0.50%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	1,200 psi
Short-term Indentation, ASTM F1914.....	0.002" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.5, Color: 4.5, Change: 4.8
Dimensional Stability, ASTM F2199.....	0.35% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Slight Surface Attack and Slight Color Change: 5% Phenol, Gasoline

Greatmats.com
117 Industrial Ave
Milltown, WI 54858
Phone: 877-822-6622
Fax: 715-825-4928
info@greatmats.com
10/2016

