


LonEco Mesa Specifications

Featuring exclusive GreenAir™ technology that significantly reduces VOC emission, LonEco Mesa provides an eco-friendly environment with superior indoor air quality and lower volatile organic emissions than other floors. The exclusive coloration provides excellent camouflage for scuffing and soil.

STANDARD SIZES (nominal)
 Overall thickness: 0.100" (2.5 mm)
 Wear layer thickness: 0.031" (0.8 mm)
 Roll size: 6' (1.83 m) wide x 60' (18.3 m)
 Weight: 0.8 lbs./sq. ft., 295 lbs./roll
 Colors: One available

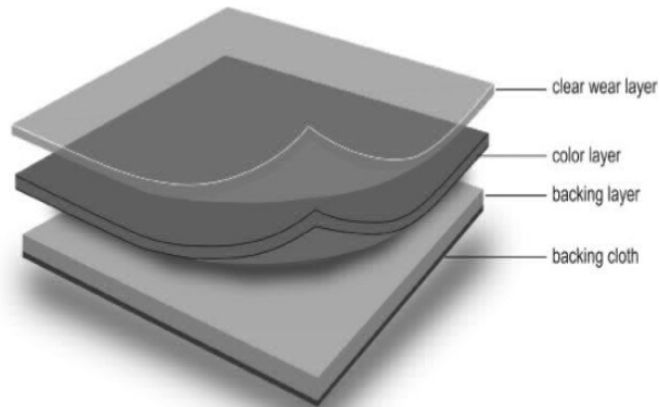

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade 1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	85
James Machine, SCOF, ASTM D2047.....	Neolite: 0.81, Neolite w/Finish: 0.85
Abrasion Resistance, ASTM D3884.....	0.1%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	500 psi
Short-term Indentation, ASTM F1914.....	0.013" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.3, Color: 4.5, Change: 4.5
Dimensional Stability, ASTM F2199.....	0.32% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	No Change

Greatmats Specialty Flooring
 117 Industrial Ave.
 Milltown, WI 54858
 877-822-6622

www.greatmats.com info@greatmats.com