


# WOOD PERFORMA FLOOR Specifications

# GREATMATS

WOOD PERFORMA Floor is designed for interior use in high-volume foot traffic and high-impact athletic and aerobic applications. With its substantial foam layer it provides an exceptional anti-fatigue flooring option.

**STANDARD SIZES (nominal) Overall thickness:** 0.217" (5.5 mm) **Wear layer thickness:** 0.020" (0.5 mm) **Roll size:** 6' (1.83 m) wide x 60' (18.3 m) **Weight:** 1.3 lbs./sq. ft., 460 lbs./roll **Colors:** Two available

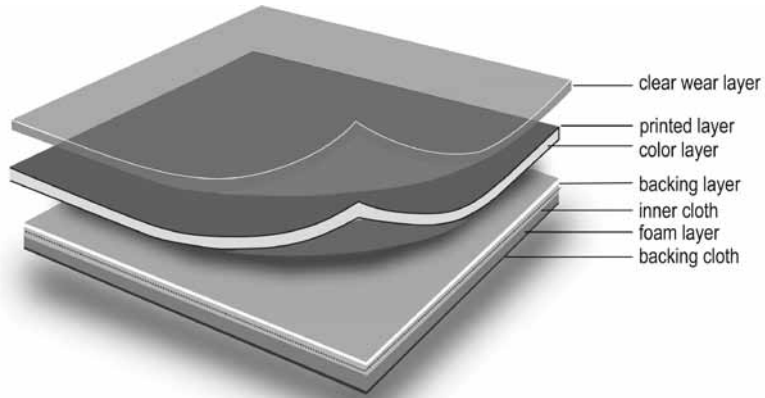

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- Up to 10% post-industrial recycled content
  - Contributes towards LEED MR 4.1
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: IEQ Credit 4.1
  - Flooring Systems: IEQ Credit 4.3

## 15-YEAR WARRANTY

Manufacturer offers a 15-year limited warranty. (Heat weld all seams.)

W548 Pattern Repeat: (nominal)  
Machine Direction: 35.8" (910 mm)  
Cross Direction: 17.8" (451 mm)

W550 Pattern Repeat: (nominal)  
Machine Direction: 37.4" (950 mm)  
Cross Direction: 24.4" (621 mm)

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class C
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.93, Neolite w/Finish: 0.98
Abrasion Resistance, ASTM D3884.....	0.23%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	450 psi
Short-term Indentation, ASTM F1914.....	0.002" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.3, Color: 4.0, Change: 4.4
Dimensional Stability, ASTM F2199.....	0.07% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	No Change

Greatmats.com  
117 Industrial Avenue, Milltown, WI 54858

Toll Free: 877-822-6622 - Fax Toll Free: 866-895-5550  
Direct Voice: 715-825-4926 - Direct Fax: 715-825-4928  
info@greatmats.com

Revised 11-12-2013