


## BestGym Reducer Strip

### Product Specifications

#### 1. Distributor

Greatmats.com  
117 Industrial Ave  
Milltown, WI 54858  
Toll free: 877-822-6622  
Fax: 715-825-4928  
E-mail: [info@greatmats.com](mailto:info@greatmats.com)  
Website: [greatmats.com](http://greatmats.com)

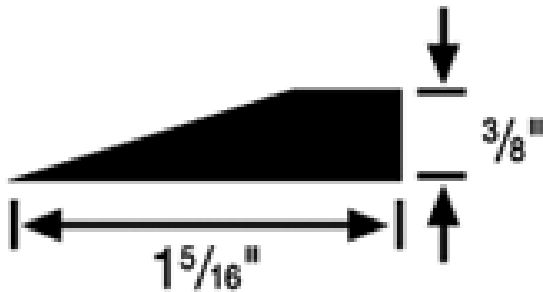

#### 2. Product Description

BestGym Reducer Strip will make your project complete.

Reducer: #26 Reducer Strip  $\frac{3}{8}$ "

- Installation Radius: 2 ft.
- 16 9-ft. sections per tube (144 ft.)

#### 3. Technical Data

BestGym Accessories were tested for Flame Spread Classification, Smoke, and Fuel Contribution – ASTM E 84 (NFPA 255).

- Surface Burning Characteristics, Flame spread:, Class C;
- BestGym accessory products are considered "incidental trim" and if they are less than 10% of aggregate ceiling and wall Class C material, may be used where Class A or B are specified.
- F-925 Resistance to Short-Term Chemical Exposure—When tested in accordance with Test Method F 925, the rubber floor accessory shall have no more than a slight change in surface dulling, surface attack, or staining when exposed to the following chemicals: White Vinegar, Rubbing Alcohol, Sodium hydroxide solution, Sulfuric acid solution, Household ammonia solution, Household bleach and Disinfectant cleaner.

**4. Installation\*** (Visit [greatmats.com](http://greatmats.com) for complete Installation instructions) Rubber Accessories are designed for interior use only with temperatures maintained from 65°F (19°C) and 85°F (30°C). Always dry-lay each rubber accessory before beginning to ensure the desired look is achieved. The flooring installer must inspect all material for manufacturing imperfections and irregularities prior to installation. Do not stretch the rubber accessories. The rubber accessories can be stretched while rolling and will later return to its original length resulting in gaps. It is important to always hand-roll the rubber accessories in the direction toward the last piece installed. If only a single accessory is being installed, roll in one direction only. Do not roll material in two directions. This practice will ensure a tight fit. Bond the rubber accessories to approve substrates within 15 minutes after applying adhesive and lightly roll with a hand wall base roller. Periodically check the back of the rubber accessories to make sure good adhesive transfer occurs.

**5. Maintenance\*** (Visit [greatmats.com](http://greatmats.com) for complete Maintenance instructions) Do not clean, rub or apply lateral or vertical pressure to the rubber accessories for at least 72 hours after the installation is complete to allow the adhesive to properly cure. BestGym Reducer Strip can be routinely cleaned by wiping with a soft cloth slightly dampened with warm water or by using a properly diluted neutral ph cleaner. CAUTION: Course cleaning materials and/or harsh cleaning agents may damage the surface of rubber accessories. Do not allow water, solutions or cleaners of any kind to work its way between the joints of rubber accessories, which can have an adverse effect on the adhesive.

#### 6. Availability and Cost

Products are available through [Greatmats.com](http://Greatmats.com). Contact Greatmats Customer Service 877-822-6622 or visit [greatmats.com](http://greatmats.com).

#### 7. Technical Assistance

Technical service information and assistance may be obtained by calling Greatmats Customer Service at 877-822-6622 or by email to [info@greatmats.com](mailto:info@greatmats.com).

#### 8. Limited Warranty

BestGym Reducer Strip is warranted for a period of one (1) year from date of installation to be free of defects in material and workmanship.

\*For complete installation and maintenance instructions visit [greatmats.com](http://greatmats.com).

Revised 7/2017