

Wood Grain Dakota with Topseal Vinyl Flooring Roll

Wood Grain Dakota with Topseal is a slightly textured sheet that evokes the open grain of oak and the nuance of knot-free, quarter-sawn plank. It coordinates beautifully with our LonCoin 2 Flecks Commercial Vinyl Flooring. This flooring is ideal for corporate, healthcare, retail and hospitality applications.


Topseal is a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)
Wear layer thickness: 0.020" (0.5 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 0.6 lbs./sq. ft., 230 lbs./roll

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

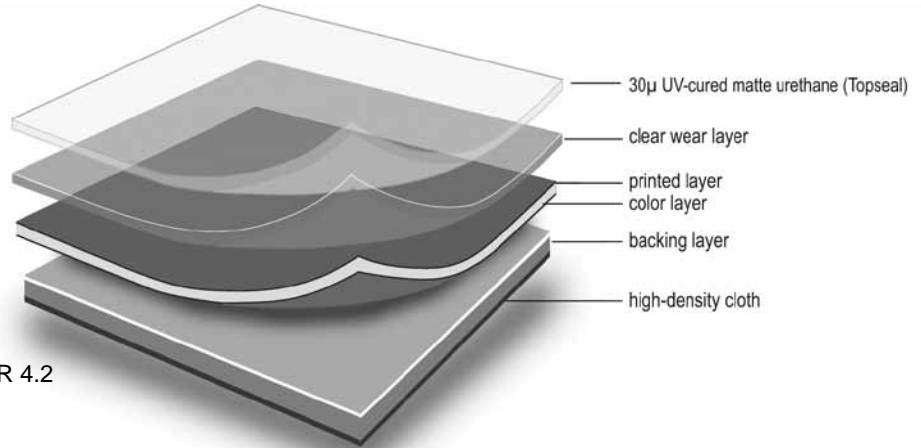

10-YEAR WARRANTY

The manufacturer offers a 10-year limited warranty.

Pattern Repeat (nominal)

Machine Direction: 35.8" (910 mm)
 Cross Direction: 17.8" (451 mm)

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	95
James Machine, SCOF, ASTM D2047.....	Neolite: 1.00
Abrasion Resistance, ASTM D3884.....	0.31%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	1,300 psi
Short-term Indentation, ASTM F1914.....	0.003" residual
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.5, Color: 4.5, Index: 4.6
Dimensional Stability, ASTM F2199.....	0.58% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	No Change

Greatmats.com
 117 Industrial Ave
 Milltown, WI 54858

Phone: 877-822-6622
 Fax: 715-825-4928
 info@greatmats.com
 12/2016



by SCS certified