

## LonFloor Vista Commercial Vinyl Rolls

LonFloor Vista is a high-performance heterogeneous sheet vinyl flooring solution available in a chic range of colorways that will add interest and sophistication to any space.

\*Due to the light color of #641, additional maintenance procedures are necessary to ensure a long lasting installation.


### STANDARD SIZES (nominal)

**Overall thickness:** 0.080" (2.0 mm)

**Wear layer thickness:** 0.031" (0.8 mm)

**Roll size:** 6' (1.8 m) wide x 60' (18.3 m)

**Weight:** 0.7 lbs./sq. ft., 250 lbs./roll

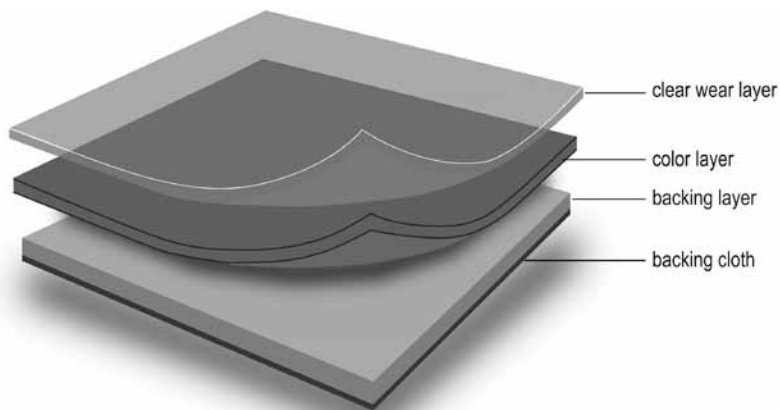

### GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 35% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

### 10-YEAR WARRANTY

The manufacturer offers a 10-year limited warranty.

### TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.76; Neolite w/ Finish: 0.76
Abrasion Resistance, ASTM D3884.....	0.60%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	1,100 psi
Short-term Indentation, ASTM F1914.....	0.009" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.5, Color: 4.5, Change: 4.7
Dimensional Stability, ASTM F2199.....	0.22% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥0.45 watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	Slight Surface Dulling: Gasoline

Greatmats.com  
117 Industrial Ave  
Milltown, WI 54858  
Phone: 877-822-6622  
Fax: 715-825-4928  
info@greatmats.com  
10/2016



by SCS Certified

