

# Dance and Stage Pro Specifications

# GREATMATS


Dance and Stage Pro is a high-performance heterogeneous sheet vinyl flooring solution that is available in tonal, neutral colorways that will add interest and sophistication to any space.

## STANDARD SIZES (nominal) Overall

**thickness:** 0.100" (2.5 mm) **Wear layer thickness:** 0.031" (0.8 mm) **Roll size:** 6' (1.83 m) wide x 60' (18.3 m) **Weight:** 0.8 lbs./sq. ft., 295 lbs./roll **Colors:** Six available

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

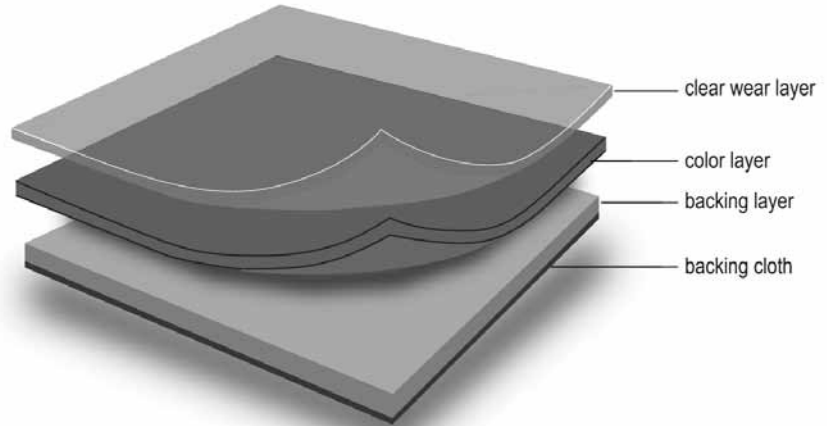

## 10-YEAR WARRANTY

Manufacturer offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class A
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.79, Neolite w/Finish: 0.81
Abrasion Resistance, ASTM D3884.....	0.4%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	800 psi
Short-term Indentation, ASTM F1914.....	0.013" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 3.0, Change: 4.1
Dimensional Stability, ASTM F2199.....	0.18% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	Slight Color Change: Gasoline

Greatmats.com

117 Industrial Avenue, Milltown, WI 54858

Toll Free: 877-822-6622 - Fax Toll Free: 866-895-5550

Direct Voice: 715-825-4926 - Direct Fax: 715-825-4928

[info@greatmats.com](mailto:info@greatmats.com)

Revised 11-12-2013