


Wood Performa Commercial Vinyl Roll

Wood Performa is designed for interior use in high-volume foot traffic and high-impact athletic and aerobic applications. With its substantial foam layer it provides an exceptional anti-fatigue flooring option.

STANDARD SIZES (nominal)

Overall thickness: 0.217" (5.5 mm)
Wear layer thickness: 0.020" (0.5 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 1.26 lbs./sq. ft., 455 lbs./roll

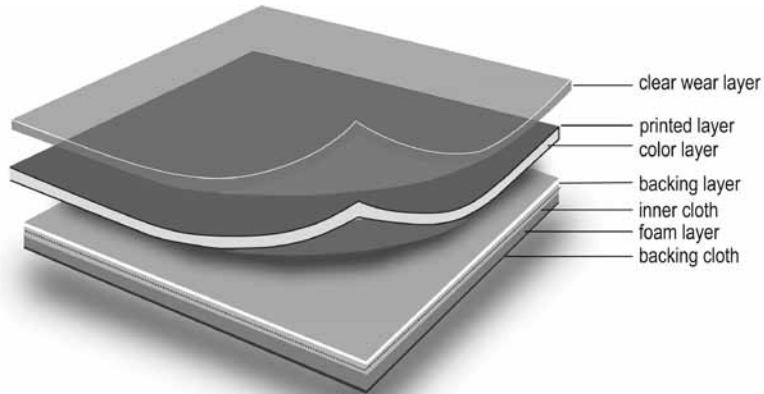

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 10% post-industrial recycled content
 - Contributes towards LEED MR 4.1
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

15-YEAR WARRANTY

The manufacturer offers a 10-year limited warranty. (Heat weld all seams.)

W548 Pattern Repeat: (nominal)
 Machine Direction: 35.8" (910 mm)
 Cross Direction: 17.8" (451 mm)

W550 Pattern Repeat: (nominal)
 Machine Direction: 37.4" (950 mm)
 Cross Direction: 24.4" (621 mm)

TECHNICAL DATA

| | |
|--|--|
| Sheet Vinyl Floor Covering with Backing, ASTM F1303..... | Type 1, Grade1, Class C |
| Flexibility, ASTM F137..... | Pass |
| Hardness, ASTM D2240..... | 90 |
| James Machine, SCOF, ASTM D2047..... | Neolite: 0.93, Neolite w/ Finish: 0.98 |
| Abrasion Resistance, ASTM D3884..... | 0.23%, 1,000 cycles |
| Static Load (max 0.005"), ASTM F970..... | 450 psi |
| Short-term Indentation, ASTM F1914..... | 0.002" residual indentation @ 75 lbs. |
| Castor Chair Test, ISO TR4918..... | 25,000 cycles - Wear: 4.3, Color: 4.0, Change: 4.4 |
| Dimensional Stability, ASTM F2199..... | 0.07% loss |
| Heat Stability, ASTM F1514..... | Pass |
| Light Stability, ASTM F1515..... | Pass |
| Critical Radiant Flux, ASTM E648..... | Class 1 ≥0.45 watts/cm ² |
| Chemical Resistance, ASTM F925..... | No Change |

Greatmats.com
 117 Industrial Ave
 Milltown, WI 54858
 Phone: 877-822-6622
 Fax: 715-825-4928
 info@greatmats.com
 11/2016



by SCS certified.

