


Roof Open Drainage Tile
Sku ADT-32x32x1

117 Industrial Ave, Milltown, WI 54858
Toll free: 877-822-6622 info@greatmats.com

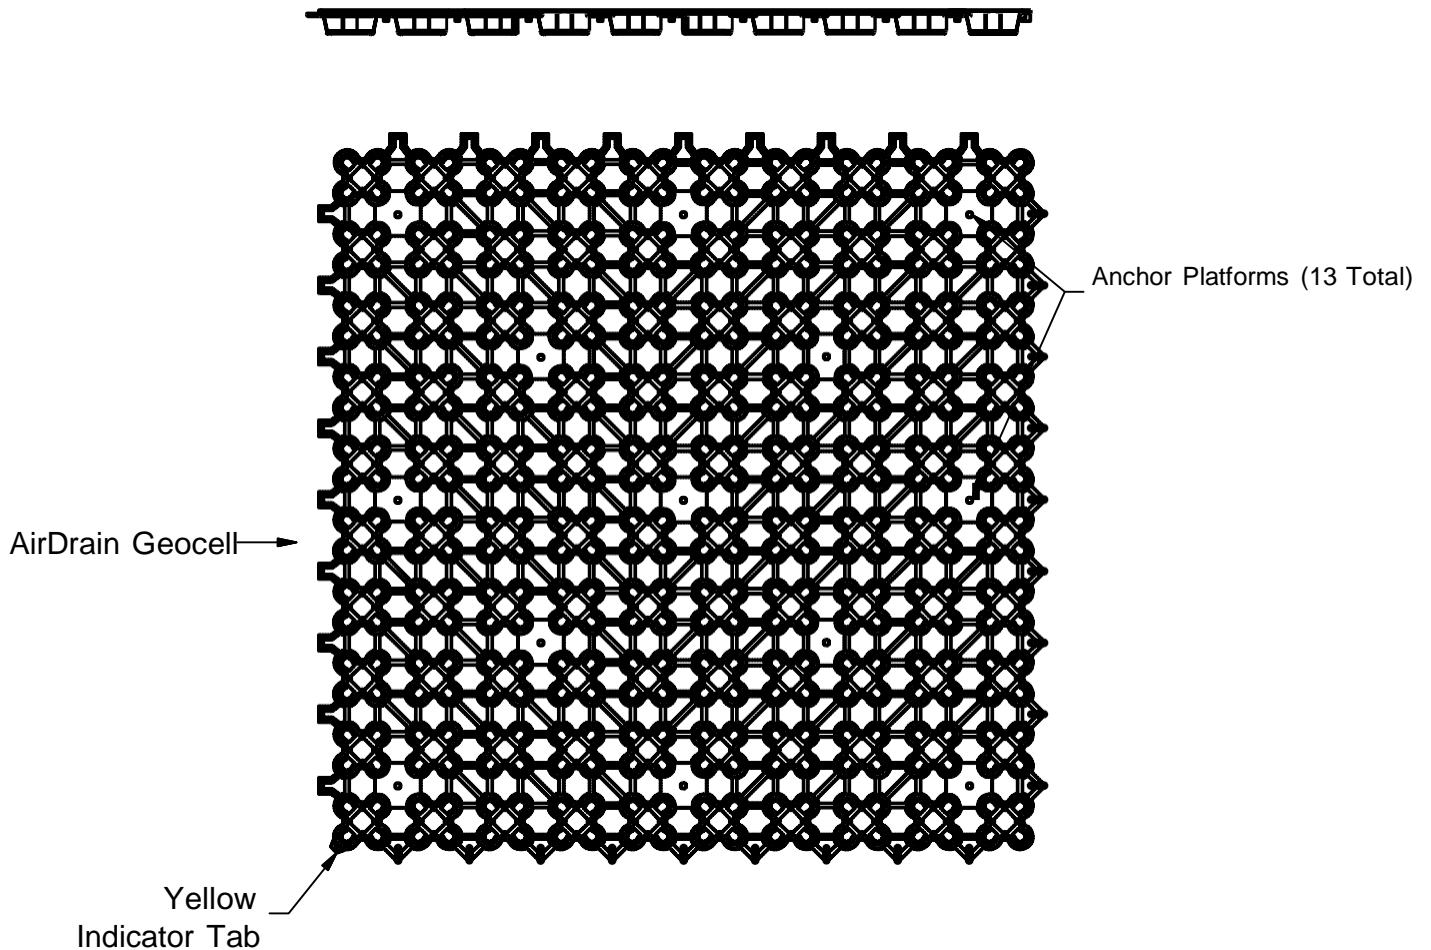

Unit Panel Specifications:

Size:	32" x 32" x 1"
Weight:	3.1 lb
Strength:	233 psi (unfilled)
Resin:	100% Recycled (PIR) Copolymer with Impact Modifier "No Break" Polymer Material
Color:	Black (3% carbon black added for UV Protection)

Roof Open Drainage Tile Cross Section

Scale 0.12:1

Typical

Drawing No. ADCS002.dwg

Roof Open Drainage Tile General Information			
General			
Construction	Injection Molded Copolymer		
Composition	Copolymer Polypropylene Using an Impact Modifier		
Dimensions	31.784" x 31.880" x 1.000" (7.03 sq ft.)		
Unit Weight	3.1 lbs.		
Material	Resin Pellets		
Shipping			
Parts Per Pallet	114		
Pallet Dimensions	33" x 33" x 48"		
Pallet Weight	390 lbs.		
Area Coverage Per Pallet	798 sq. ft.		
Pallets Per Trailer	114 (3 wide x 2 tall x 19 deep)		
Area Covered Per Trailer	90,972 sq. ft.		
ASTM and ISO Properties ¹			
Physical	Nominal Value	Test Method	
Specific Gravity	0.940	ASTM D792	
Melt Mass-Flow Rate (230°C/2.16 kg)	20 g/10 min	ASTM D1238	
Mechanical	Nominal Value	Test Method	
Density	57.490 lb/ft ³	ASTM D1505	
Tensile Strength (Yield, 73°F)	2,145 psi	ASTM D638	
Tensile Elongation (Yield, 73°F)	16%	ASTM D638	
Flexural Modulus (73°F)	100,175 psi	ASTM D790	
Compression Strength (73°F)	233 psi unfilled	ASTM D6254	
Impact	Nominal Value	Test Method	
Notched Izod Impact (73°F, 0.125 in)		ASTM D256	
Thermal	Nominal Value	Test Method	
Deflection Temperature Under Load 264 psi, Unannealed	160°F	ASTM D648	
Expansion/Contraction Index ¹			
Temperature	Humidity	Length	Width
100°F	98%	31.881"	31.817"
-5°F	0%	31.765"	31.713"
Change		.116"	.104"
Joint Expansion/Contraction Capacity		.420"	.572"
Safety Factor		362%	550%
Examples of Usage			
Application	Required Strength	Safety Factor	
Auto	40 psi	x 168	
Truck	110 psi	x 61	

¹ Independent laboratory testing conducted by TRI/Environmental, Inc., TSI/Testing Services, Inc. and Wassenaar.